



APPLICATIONS: Use model 2601 whenever a full extension, very low profile slide is required. Ideal for use in tool boxes, laboratory furniture, and store fixtures. Not suitable for flat mounting. **This product is covered by U.S. (6,254,209) and various foreign patents issued and/or pending.**

Full Extension, Hold-In Detent
Very Low Profile
Up to 75-lb. [34 kg] Capacity**



- ① This mounting hole is **not** accessible on model 2601-12 [300mm].
- ② This mounting slot is **only** available on model 2601-16 [400mm].
- ③ This mounting slot is **not** accessible on model 2601-16 [400mm].

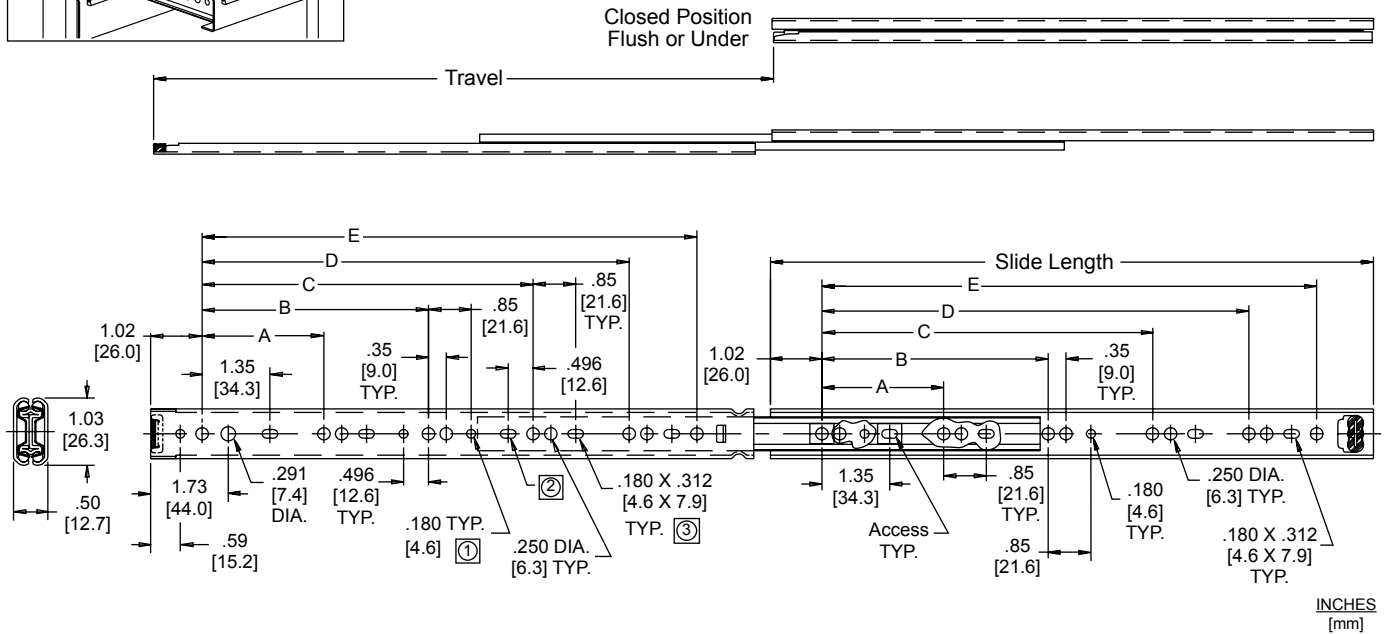

Finish	Bright electro-zinc plating (C) or black zinc (CB) finish available	Side Space	.50" +.030/ -.000 [12.7mm +0.8/ -0.0]
Lengths	Even lengths from 8" to 22" [200mm to 550mm]	Mounting	Side
Travel	Full extension	Hardware	#6 truss head screw
Height	1.03" [26.3mm]	Movement	Steel ball bearings
Load Rating	See chart	Features	Hold-in detent, silenced movement in and out

** Load rating based on a 16" wide drawer cycled 10,000 times.

Part Number	Slide Length	Slide Travel	Load Rating lb [kg]/pair **	A	B	C	D	E
2601-8	7.87 [200]	8.23 [209]	35 lb [16 kg]	5.04 [128.0]				
2601-10	9.84 [250]	10.20 [259]	50 lb [23 kg]	5.04 [128.0]				
2601-12	11.81 [300]	12.13 [308]	70 lb [32 kg]	5.04 [128.0]	8.82 [224.0]			
2601-14	13.78 [350]	14.06 [357]	75 lb [34 kg]	5.04 [128.0]	8.82 [224.0]			
2601-16	15.75 [400]	15.98 [406]	70 lb [32 kg]	5.04 [128.0]	8.82 [224.0]	12.60 [320.0]		
2601-18	17.72 [450]	17.95 [456]	65 lb [30 kg]	5.04 [128.0]	8.82 [224.0]	13.86 [352.0]		
2601-20	19.69 [500]	19.88 [505]	63 lb [29 kg]	5.04 [128.0]	8.82 [224.0]	13.86 [352.0]	16.38 [416.0]	
2601-22	21.65 [550]	21.81 [554]	60 lb [27 kg]	5.04 [128.0]	8.82 [224.0]	13.86 [352.0]	17.64 [448.0]	19.25 [489.0]

