


Applications: Utility and industrial truck bodies, industrial work stations, heavy duty machine tools and mechanical devices. Use model 3601 whenever a heavy duty, over travel slide is required.

Three Member, Over Travel
Heavy Duty Slide
Up to 255 lb.* [116 kg.] Capacity

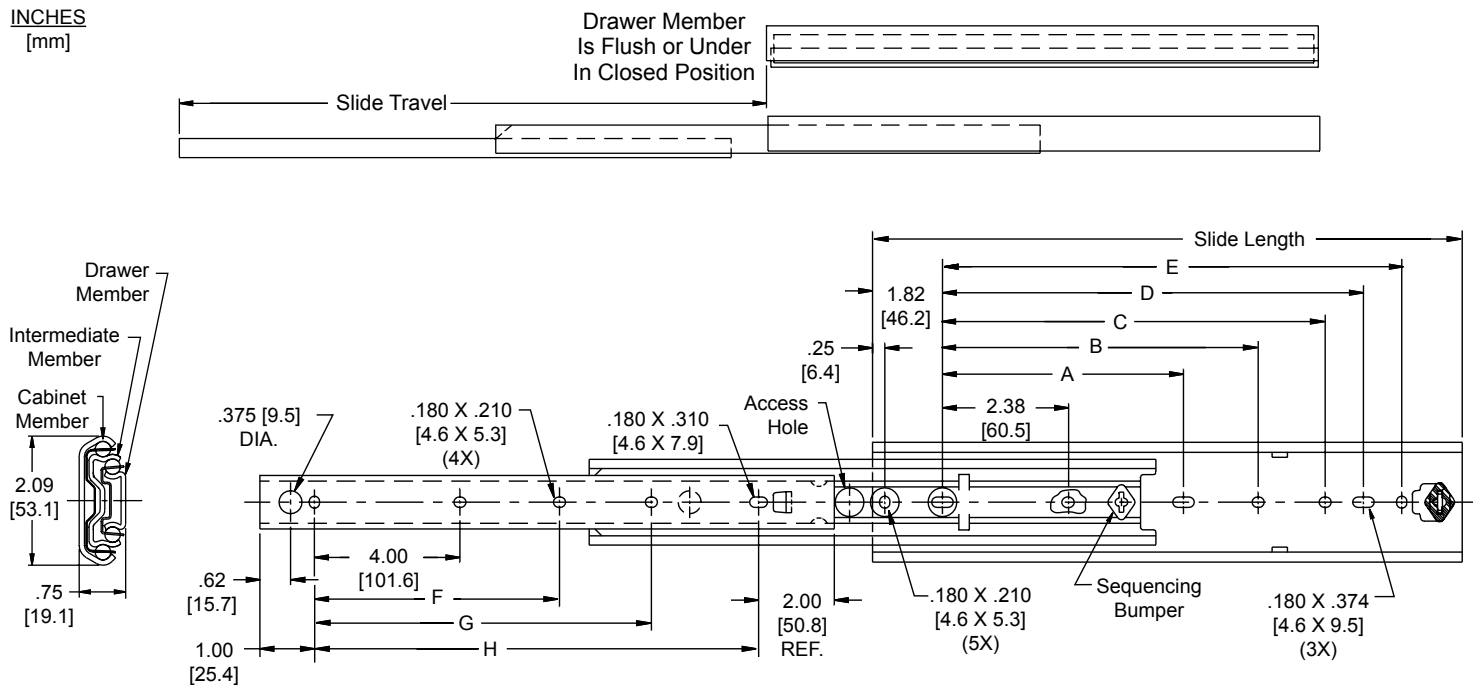

Finish Bright electro-zinc (C) plating
Length 12" to 28" [304.85mm to 711.2mm]
Travel Length plus 1" [25.4mm]
Height 2.09" [53.1mm]
Side Space .75" + .030 / - .000 [19.1mm + .76mm / -0.00]

Load Rating See chart*
Mounting Side, bracket or hard mounting
Hardware #8 pan head screws
Movement Steel ball bearings
Features Closed position hold-in detent

* Load rating based on an 18" slide in a 16" wide drawer cycled 10,000 times.

Part Number	Slide Length	Slide Travel	Load* Rating lbs [kg]	A	B	C	D	E	F	G	H
3601-12	12.00 [304.8]	13.00 [330.2]	255 [116]	-	5.33 [135.4]	7.05 [179.1]	8.05 [204.5]	9.05 [229.9]		6.13 [155.6]	9.00 [228.6]
3601-14	14.00 [355.6]	15.00 [381.0]	248 [112]	-	7.33 [186.2]	9.05 [229.9]	10.05 [255.3]	11.05 [280.7]		8.13 [206.4]	11.00 [279.4]
3601-16	16.00 [406.4]	17.00 [431.8]	241 [109]	-	9.33 [237.0]	11.05 [280.7]	12.05 [306.1]	13.05 [331.5]		10.13 [257.2]	13.00 [330.2]
3601-18	18.00 [457.2]	19.00 [482.6]	234 [106]	7.50 [190.5]	11.33 [287.8]	13.05 [331.5]	14.05 [356.9]	15.05 [382.3]		12.13 [308.0]	15.00 [381.0]
3601-20	20.00 [508.0]	21.00 [533.4]	225 [102]	8.50 [215.9]	13.33 [338.6]	15.05 [382.3]	16.05 [407.7]	17.05 [433.1]	8.00 [203.2]	14.13 [358.8]	17.00 [431.8]
3601-22	22.00 [558.8]	23.00 [584.2]	215 [98]	9.50 [241.3]	15.33 [389.4]	17.05 [433.1]	18.05 [458.5]	19.05 [483.9]	9.00 [228.6]	16.13 [409.6]	19.00 [482.6]
3601-24	24.00 [609.6]	25.00 [635.0]	203 [92]	10.50 [266.7]	17.33 [440.2]	19.05 [483.9]	20.05 [509.3]	21.05 [534.7]	10.00 [254.0]	18.13 [460.4]	21.00 [533.4]
3601-26	26.00 [660.4]	27.00 [685.8]	188 [85]	11.50 [292.1]	19.33 [491.0]	21.05 [534.7]	22.05 [560.1]	23.05 [585.5]	11.00 [279.4]	20.13 [511.2]	23.00 [584.2]
3601-28	28.00 [711.2]	29.00 [736.6]	169 [77]	12.50 [317.5]	21.33 [541.8]	23.05 [585.5]	24.05 [610.9]	25.05 [636.3]	12.00 [304.8]	22.13 [562.0]	25.00 [635.0]

Installation Instructions

Instructions to Hard Mount

1. With slides fully extended, install slide cabinet members (largest) into cabinet using # 8 pan head screw through uncovered mounting slots. Move intermediate members to allow access to remaining slots. Ensure slides are parallel.
2. Mount slide drawer members (smallest) to chassis. Access covered mounting screw holes by moving the intermediate members away from you. Leave all screws loose for future adjustment. Make sure slides are parallel.
3. It may be necessary to use a hoist for positioning and aligning the chassis when the weight exceeds 50 lbs. [23 kg.]. Check slide alignment by opening and closing the chassis. Any sign of binding indicates lateral stress or mis-alignment.
4. Adjust slide position until movement is smooth. Tighten all screws and if necessary use more to secure slides and complete installation.

Slide Ordering Instructions

Complete your slide order for model 3601 by specifying the following:

Total Slides Required	_____	10 each	C	3601	-18	D
Slide Finish	_____					
Slide Model	_____					
Slide Length	_____					
Optional Polybag Packaging	_____					

Includes screw hardware kit

Packaging

Distributor (D) Pack: All lengths are packaged 5 pair per box. Polybag includes one pair of slides packaged with screws. Optional mounting bracket **kits** are ordered separately.

Bulk (P) Pack: Lengths 12" - 20" 7 pair per box
Lengths 22" - 28" 5 pair per box

Specifications

Slide members and ball retainers: Cold rolled steel
Ball bearings: Carburized steel
RoHS Compliant

Note: Specifications, materials, prices, terms, and delivery are subject to change without notice.

Accuride®

ACCURIDE INTERNATIONAL INC.

12311 Shoemaker Avenue
Santa Fe Springs, CA 90670

TEL (562) 903-0200
FAX (562) 903-0208

www accuride.com

Manufacturing, Engineering, and Sales

United States • Germany • Japan • Mexico • United Kingdom • China